

## 220 Watt Foldable Solar Panel

The 220 Watt Foldable Solar Panel is lightweight, durable and extremely portable.

The solar panels are mounted to weather resistant fabric that quickly folds for storage and unfolds for use.

Unmatched durability allows for use in the harshest environments and a panel that works even after a portion is damaged.

This compact panel is the perfect accessory to provide power for a wide range of electronics.

The 220 Watt Foldable Solar Panel keeps you connected, powers your outdoor life, and helps you get more out of your outdoor adventures.

### Tips For Best Use:

- Angle the solar panel toward the sun for best results.
- Always store in a cool dry environment.
- Not designed for use in the rain.
- Allow time to air dry before packing if the panel is wet.
- Routinely clean the solar panels to ensure best performance.



### Benefits Include:

- Compact, lightweight, durable - military tested (MIL-STD-810G).
- Easy to deploy and easy to store.
- Provides some power even in hazy and shaded environments.
- Light sensitive technology turns on early in the day and stays on later in the day.
- Multiple charging adapters to fit your needs and charge a wide range of devices.
- Designed, engineered and manufactured in the United States.

### Foldable Charging Capabilities

| Devices:         | 30 Watt | 60 Watt | 90 Watt | 120 Watt | 220 Watt |
|------------------|---------|---------|---------|----------|----------|
| Cell Phone       | ✓       | ✓       | ✓       | ✓        | ✓        |
| Tablet           | ✓       | ✓       | ✓       | ✓        | ✓        |
| Laptop           |         |         | ✓       | ✓        | ✓        |
| Battery (400 Wh) |         |         | ✓       | ✓        | ✓        |

### Certifications:

- CE
- MIL-STD-810G
- RoHS
- Berry Amendment Compliance

# PowerFilm<sup>®</sup>

MADE IN THE USA

## SOLAR

## 220 Watt Foldable Solar Panel

### Electrical Characteristics

|                       |       |
|-----------------------|-------|
| Rated Voltage at Pmax | 15.4V |
| Rated Current at Pmax | 7.2A  |
| Open Circuit Voltage  | 21.9V |
| Short Circuit Current | 18.6A |

### Physical Characteristics

|                     |   |
|---------------------|---|
| Part Number         | FM16-14400  |
| Folded Dimensions   | 31.5 x 17.7 x 2.5 inches<br>800.1 x 449.6 x 63.5 mm |
| Unfolded Dimensions | 172.0 x 57.7 inches<br>4,368.8 x 1,465.6 mm         |
| Weight              | 14.0 lbs<br>6.4 kg                                  |


### Thermal Characteristics

|                                     |               |
|-------------------------------------|---------------|
| Temperature Coefficient for Power   | - 0.200 (%/C) |
| Temperature Coefficient for Voltage | - 0.240 (%/C) |
| Temperature Coefficient for Voc     | - 0.300 (%/C) |
| Temperature Coefficient for Isc     | 0.109 (%/C)   |

### Connectors

**Standard Connector:**  
Delphi Weatherpack

**Custom Connectors:**  
SAE  
4.5 MM Barrel  
Anderson Powerpole

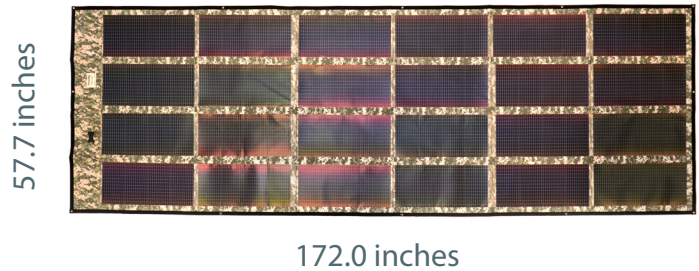

**Standard Colors:**  
Stealth Black

**Custom Colors:**  
Camouflage  
Digicam  
Desert Camo  
Khaki  
Woodland

### IV Curve

