

AT-180X-S
XLR Series Variable Lights
Data Sheet



AT-180X-S Variable Light

- Up to three digitally controlled illumination angles within the same unit; select from 10°, 30°, 60° & 130°
- Available in IR, White Light or Hybrid (IR+White Light)
- I/O Ports for camera synchronization and light management
- IP Network Controller-ready for full control via browser or VMS
- FlexMount with adjustable angle for added coverage up to 180°
- **Combine two systems for 360° coverage**
- Built-in Day/Night switch
- Digital intensity control
- Low Voltage

Made in the USA

- All illuminators designed and built in Salt Lake City, UT, USA

Lifetime Warranty with Advanced Replacement

- We value your trust, that's why all products are covered by a lifetime warranty with advanced replacement




TECHNICAL SPECIFICATIONS

Wavelength:	850nm (semi-covert)
Input Voltage:	24V DC
Power Consumption:	180 W
Operating Temperature:	-40°F...+122°F/-40°C...+52°C
Dimensions:	17" x 7" x 3.9" / 432 x 178 x 99 mm
Weight	11 lb. / 5 kg.
Environmental	IP 67



ILLUMINATION DISTANCE

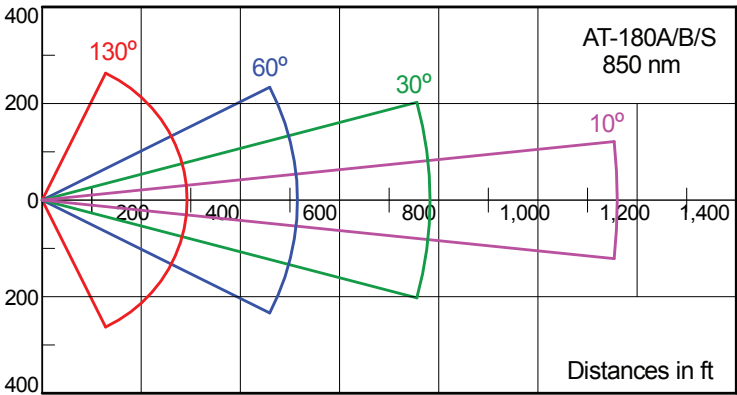

ANGLE	RANGE	HFOV
10°	1160'/352m	242'/73m
30°	784'/237m	405'/123m
60°	515'/156m	467'/141m
130°	294'/89m	525'/159m